

# UH300 Series HMI



Bran-new 7 inch,10 inch.

Ethernet port support Siemens Smart 1200/1500.


RS485 and RS232 supported,removable commnication terminal with terminal resistance,remote communication supported.

# IN THE HOT SALES!

# Specification Parameter

Item No	UH310E	UH307E	UH307S
Item No	UH 310-2EU01-0AA0	UH 307-2EU01-0AA0	UH 307-2AU01-0AA0
Display Size	10.1"TFT	7"TFT	7"TFT
Display color	65536	65536	65536
Resolution	1024*600	800*480	800*480
backlight	LED	LED	LED
brightness	200cd/m <sup>2</sup>	200cd/m <sup>2</sup>	200cd/m <sup>2</sup>
Screen type	4 wire high precision resistance net work	4 wire high precision resistance net work	4 wire high precision resistance net work
Memory	128M Flash+64M DRAM	128M Flash+64M DRAM	128M Flash+64M DRAM
Real time	yes	yes	yes
USB Host	USD2.0*1	USD2.0*1	USD2.0*1
USB Slave	USD2.0*1	USD2.0*1	USD2.0*1
Series port	COM1RS485,COM2,RS232	COM1RS485,COM2,RS232	COM1RS485,COM2,RS232
Ethernet port	10M/100M self-adaption	10M/100M self-adaption	NC
Rated Voltage	DC24V	DC24V	DC24V
Dimension	273*193mm	203*149mm	203*149mm
Hole size	261*180mm	192*138mm	192*138mm
IP grade	IP65	IP65	IP65

# Appearance and hole size

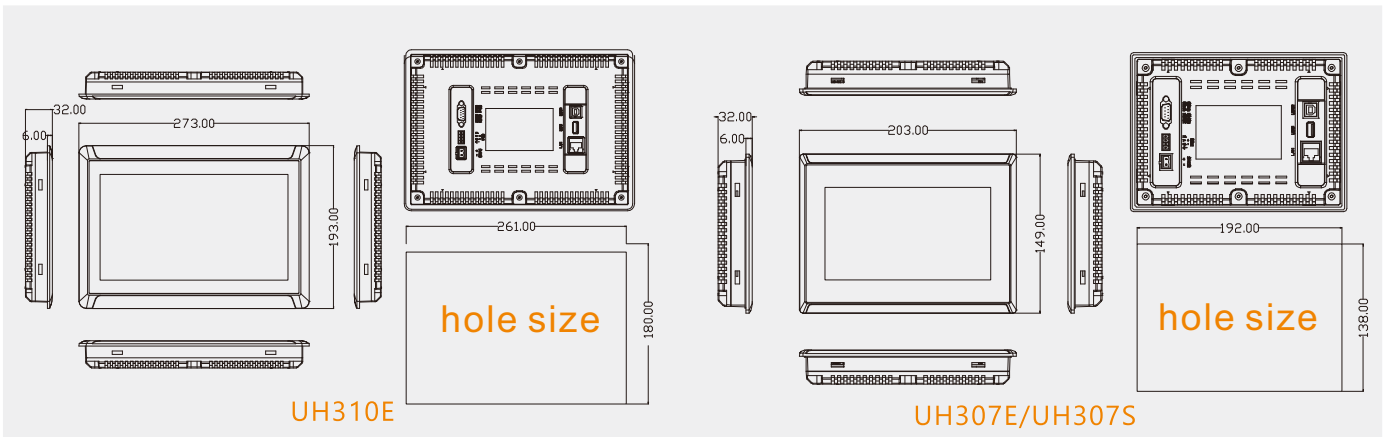

# Communication port definition

DB9				Removable terminal					
Diagram	Interface	PIN	Pin definition	Interface	PIN	Pin definition	Remarks	Diagram	
	COM2	1	-	COM1	1	R	120Ω terminal resistance		
		2	RS232 RXD		2	RS485+	(A)		
		3	RS232 TXD		3	RS485-	(B)		
		4	-		4	PE	Shield ground		
		5	GND	Removable terminal COM1 is the same RS485 port as the					
	COM1	6	-	DB9 COM1					
		7	RS485+(A)						
		8	RS485-(B)						
		9	-						

