

# MGate MB3660 Series

## 8 and 16-port redundant Modbus gateways



### Features and Benefits

- Supports Auto Device Routing for easy configuration
- Supports route by TCP port or IP address for flexible deployment
- Innovative Command Learning for improving system performance
- Supports agent mode for high performance through active and parallel polling of serial devices
- Supports Modbus serial master to Modbus serial slave communications
- 2 Ethernet ports with the same IP or dual IP addresses for network redundancy
- microSD card for configuration backup/duplication and event logs
- Accessed by up to 256 Modbus TCP clients
- Connects up to Modbus 128 TCP servers
- RJ45 serial interface (for “-J” models)
- Serial port with 2 kV isolation protection (for “-I” models)
- Dual VDC or VAC power inputs with wide power input range
- Embedded traffic monitoring/diagnostic information for easy troubleshooting
- Status monitoring and fault protection for easy maintenance

### Certifications



## Introduction

The MGate MB3660 (MB3660-8 and MB3660-16) gateways are redundant Modbus gateways that convert between the Modbus TCP and Modbus RTU/ASCII protocols. They can be accessed by up to 256 TCP master/client devices, or connect to 128 TCP slave/server devices. The MGate MB3660 isolation model provides 2 kV isolation protection suitable for power substation applications. The MGate MB3660 gateways are designed to easily integrate Modbus TCP and RTU/ASCII networks. The MGate MB3660 gateways offer features that make network integration easy, customizable, and compatible with almost any Modbus network.

For large-scale Modbus deployments, MGate MB3660 gateways can effectively connect a large number of Modbus nodes to the same network. The MB3660 Series can physically manage up to 248 serial slave nodes for 8-port models or 496 serial slave nodes for 16-port models (the Modbus standard only defines Modbus IDs from 1 to 247). Each RS-232/422/485 serial port can be configured individually for Modbus RTU or Modbus ASCII operation and for different baudrates, allowing both types of networks to be integrated with Modbus TCP through one Modbus gateway.

### High Performance with Innovative Command Learning

The MGate MB3660 gateways support two communication modes: transparent mode and agent mode. For transparent mode, the gateway converts Modbus commands from Modbus TCP to Modbus RTU/ASCII, and vice versa, or from serial (master) to serial (slave). However, since only one Modbus protocol request-response action can be executed at any given time, each Modbus device has to wait its turn, resulting in poorer performance.

In order to provide better performance, the MGate MB3660 gateways are designed with an innovative Command Learning function, which can be activated with a single mouse click. Once activated, the gateway will learn and remember the Modbus commands it receives, and once a command has been learned, the gateway will act as though it were in agent mode, and actively send Modbus requests to the relevant Modbus devices. Since the data is saved in a different memory space that can be accessed by the SCADA system, the SCADA system can retrieve Modbus response data directly from the gateway’s memory, instead of waiting for the data to pass through the Modbus devices, dramatically increasing communication performance.

### Auto-Device Routing for Easy Configuration (Patent Pending)

Moxa’s Auto-Device Routing function helps eliminate many of the problems and inconveniences encountered by engineers who need to configure large numbers of Modbus devices. A single mouse click is all that’s required to set up a slave ID routing table and configure Modbus gateways to

automatically detect Modbus requests from a supervisory control and data acquisition (SCADA) system. By removing the need to manually create the slave ID routing table, the Auto-Device Routing function saves engineers significant time and reduces cost.

## Modbus Gateway with Power and Ethernet Redundancy

For a complicated Modbus system, redundancy is extremely important. The MGate MB3660 Modbus gateways support redundancy for both the power input and Ethernet connection. The MGate MB3660 gateways come with dual AC or DC power inputs built in for power redundancy, and have dual Ethernet ports (with different IPs) for network redundancy. To accommodate different types of applications, the dual Ethernet ports can be configured in one of two ways:

- Use the same IP for both Ethernet ports. In this case, the MGate MB3660 gateway will automatically switch to the backup LAN when the main LAN fails.
- Use different IP addresses for each of the two Ethernet ports. In this case, Modbus clients/masters can use both Ethernet ports to communicate with Modbus RTU/ASCII slave devices at the same time.

## Specifications

### Ethernet Interface

10/100BaseT(X) Ports (RJ45 connector)	2 IP addresses Auto MDI/MDI-X connection
---------------------------------------	---

### Ethernet Software Features

Industrial Protocols	Modbus TCP Client (Master), Modbus TCP Server (Slave)
Configuration Options	Telnet Console, Device Search Utility (DSU), Web Console (HTTP), Serial Console
Management	SNMPv1, SMTP, NTP Client, DNS, DHCP Client, ARP, RADIUS, TCP/IP, UDP

### Serial Interface

No. of Ports	MGate MB3660-8 Series: 8 MGate MB3660-16 Series: 16
Connector	MGate MB3660-8/16: DB9 male MGate MB3660-8/16-J: RJ45
Serial Standards	R2-232/422/485 (software selectable)
Baudrate	50 bps to 921.6 kbps
Data Bits	7, 8
Parity	None, Even, Odd, Space, Mark
Stop Bits	1, 2
Flow Control	RTS/CTS, DTR/DSR, RTS Toggle (RS-232 only)
RS-485 Data Direction Control	ADDC® (automatic data direction control)
Pull High/Low Resistor for RS-485	1 kilo-ohm, 150 kilo-ohms
Terminator for RS-485	120 ohms
Isolation	2 kV (I models)

### Serial Signals

RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND

### Serial Software Features

Industrial Protocols	Modbus RTU/ASCII Master, Modbus RTU/ASCII Slave
----------------------	---

## Modbus RTU/ASCII

Functions Supported	1, 2, 3, 4, 5, 6, 15, 16, 23
Max. No. of Commands	256 per serial port
Memory Size	65535 bytes

## Modbus TCP

Functions Supported	1, 2, 3, 4, 5, 6, 15, 16, 23
Max. No. of Commands	256
Memory Size	65535 bytes

## Modbus (Transparent)

Max. No. of Client Connections	256
Max. No. of Server Connections	128

## Power Parameters

Input Voltage	All models: Redundant dual inputs AC models: 100 to 240 VAC (47 to 63 Hz) DC models: 20 to 60 VDC (1.5 kV isolation)
No. of Power Inputs	2
Power Connector	Terminal block (for DC models)
Power Consumption	MGate MB3660-8-2AC: 144 mA @ 110 VAC MGate MB3660-8-J-2AC: 111 mA @ 110 VAC MGate MB3660-16-2AC: 178 mA @ 110 VAC MGate MB3660-16-J-2AC: 133 mA @ 110 VAC MGate MB3660I-8-2AC: 244 mA @ 110 VAC MGate MB3660I-16-2AC: 351 mA @ 110 VAC MGate MB3660-8-2DC: 312 mA @ 24 VDC MGate MB3660-16-2DC: 390 mA @ 24 VDC

## Relays

Contact Current Rating	Resistive load: 2 A @ 30 VDC
------------------------	------------------------------

## Physical Characteristics

Housing	Metal
IP Rating	IP30
Dimensions (with ears)	480 x 45 x 198 mm (18.90 x 1.77 x 7.80 in)
Dimensions (without ears)	440 x 45 x 198 mm (17.32 x 1.77 x 7.80 in)
Weight	MGate MB3660-8-2AC: 2731 g (6.02 lb) MGate MB3660-8-2DC: 2684 g (5.92 lb) MGate MB3660-8-J-2AC: 2600 g (5.73 lb) MGate MB3660-16-2AC: 2830 g (6.24 lb) MGate MB3660-16-2DC: 2780 g (6.13 lb) MGate MB3660-16-J-2AC: 2670 g (5.89 lb) MGate MB3660I-8-2AC: 2753 g (6.07 lb) MGate MB3660I-16-2AC: 2820 g (6.22 lb)

## Environmental Limits

Operating Temperature	0 to 60°C (32 to 140°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

## Standards and Certifications

Safety	EN 60950-1, UL 60950-1
EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Freefall	IEC 60068-2-31
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6, IEC 60068-2-64

## MTBF

Time	MGate MB3660-8-2AC: 716,647 hrs MGate MB3660-8-2DC: 706,783 hrs MGate MB3660-8-J-2AC: 616,505 hrs MGate MB3660-16-2AC: 487,416 hrs MGate MB3660-16-2DC: 482,835 hrs MGate MB3660-16-J-2AC: 437,337 hrs MGate MB3660I-8-2AC: 224,851 hrs MGate MB3660I-16-2AC: 114,595 hrs
Standards	Telcordia SR332

## Warranty


Warranty Period	5 years
Details	See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>

## Package Contents

Device	1 x MGate MB3660 Series gateway
Documentation	1 x document and software CD 1 x quick installation guide 1 x warranty card

## Dimensions

Unit: mm (inch)

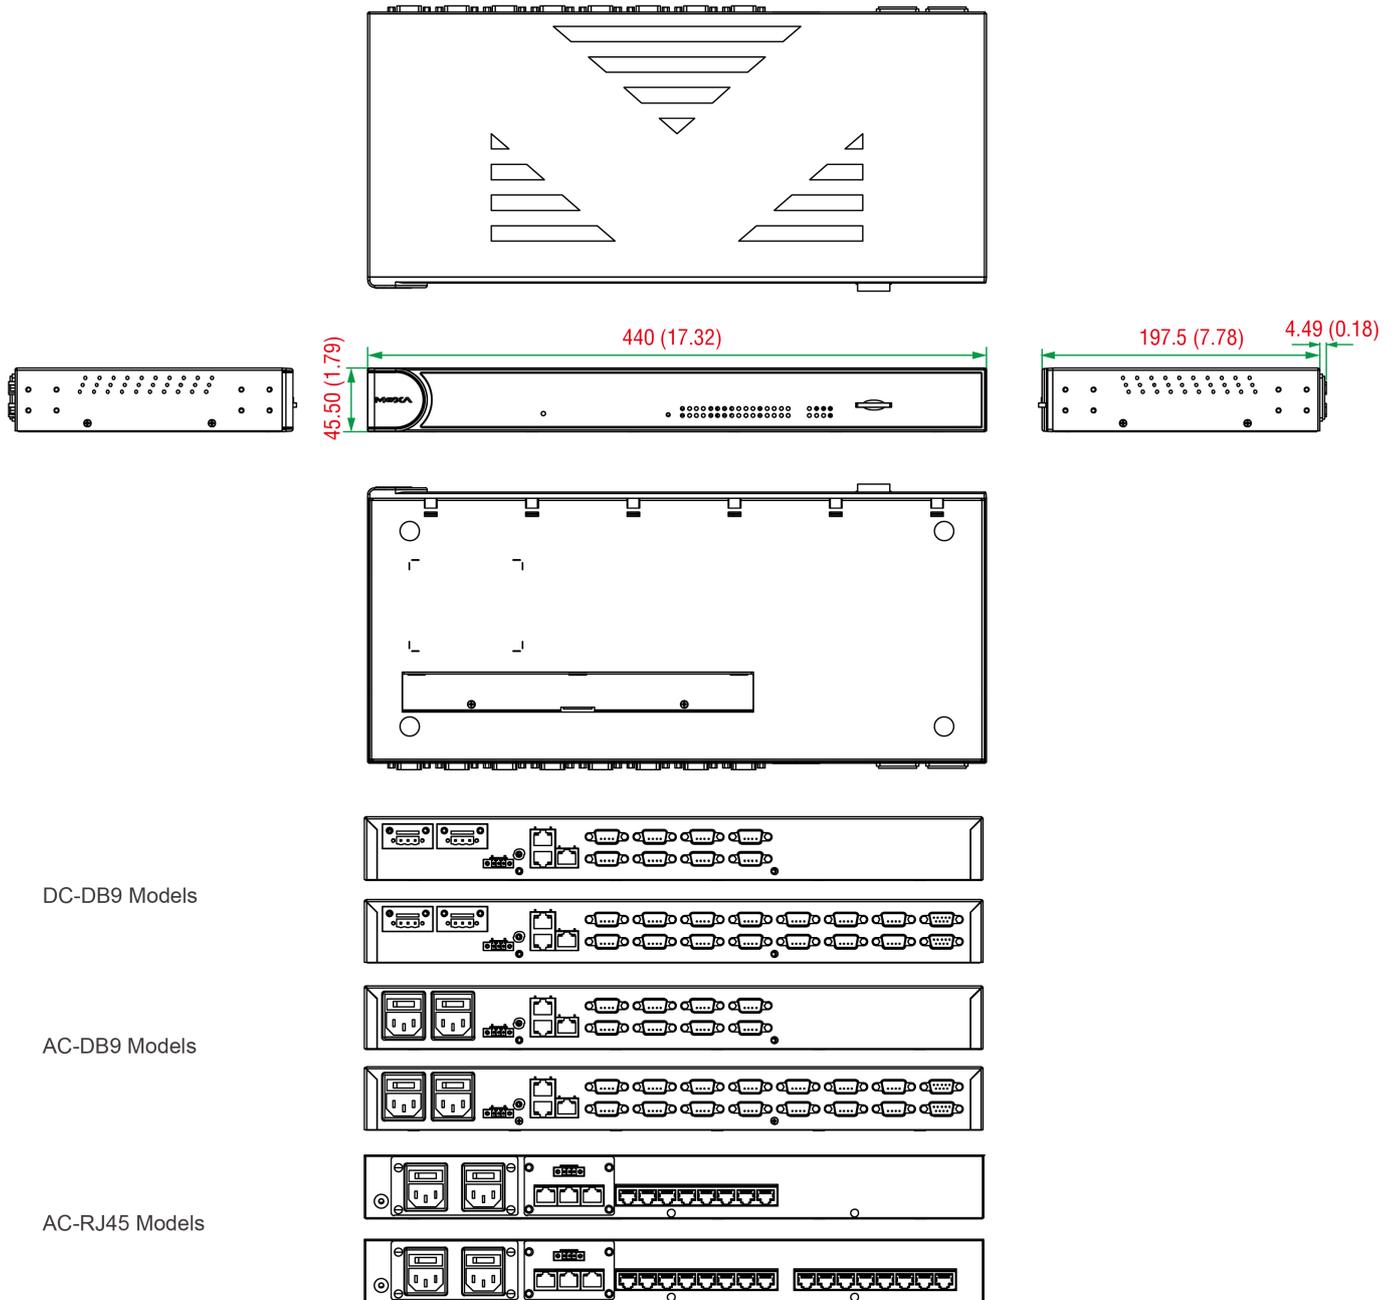

## Ordering Information

Model Name	No. of Serial Ports	Serial Connector	Serial Isolation	Input Voltage
MGate MB3660-8-2DC	8	DB9 male	-	20-60 VDC (1.5 kV isolation)
MGate MB3660-16-2DC	16	DB9 male	-	20-60 VDC (1.5 kV isolation)
MGate MB3660-8-2AC	8	DB9 male	-	100-240 VAC (47-63 Hz)
MGate MB3660-16-2AC	16	DB9 male	-	100-240 VAC (47-63 Hz)
MGate MB3660I-8-2AC	8	DB9 male	2 kV	100-240 VAC (47-63 Hz)
MGate MB3660I-16-2AC	16	DB9 male	2 kV	100-240 VAC (47-63 Hz)
MGate MB3660-8-J-2AC	8	RJ45	-	100-240 VAC (47-63 Hz)
MGate MB3660-16-J-2AC	16	RJ45	-	100-240 VAC (47-63 Hz)

## Accessories (sold separately)

### Cables

CBL-F9M9-150	DB9 female to DB9 male serial cable, 1.5 m
CBL-F9M9-20	DB9 female to DB9 male serial cable, 20 cm
CBL-RJ45F9-150	RJ45 to DB9 female serial cable, 1.5 m
CBL-RJ45SF9-150	RJ45 to DB9 female serial shielded cable, 1.5 m

### Connectors

Mini DB9F-to-TB	DB9 female to terminal block connector
-----------------	--

### Rack-Mounting Kits

WK-45-01	Wall-mounting kit, 2 L-shaped plates, 6 screws, 45 x 57 x 2.5 mm
----------	--

### Power Cords

PWC-C13AU-3B-183	Power cord with Australian (AU) plug, 1.83 m
PWC-C13CN-3B-183	Power cord with three-prong China (CN) plug, 1.83 m
PWC-C13EU-3B-183	Power cord with Continental Europe (EU) plug, 1.83 m
PWC-C13JP-3B-183	Power cord with Japan (JP) plug, 7A/125V, 1.83 m
PWC-C13UK-3B-183	Power cord with United Kingdom (UK) plug, 1.83 m
PWC-C13US-3B-183	Power cord with United States (US) plug, 1.83 m
CBL-PJTB-10	Non-locking barrel plug to bare-wire cable

© Moxa Inc. All rights reserved. Updated Jan 14, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.